

LEISTER

PLASTIC WELDING

NEW

TWINNY T7/T5

Plug and weld



www.leister.com

We know how.


Plug and weld – TWINNY T7 und TWINNY T5

If you want to weld thin or thick geomembranes (0.5 to 2.5 mm) 20-100 mils quickly, easily and safely, the TWINNY T7 or TWINNY T5 are your go-to automatic welders. Both tools are well-rounded, thanks to their practical design and intuitive operation. The TWINNY T7 comes equipped with highly-efficient data recording ability thanks to the LQS function, GPS, Wi-Fi and connection to the myLeister app are guaranteed. Plug and weld – TWINNY T7 and T5.

Hot-air welder

TWINNY T7/T5

1		quick drive speed of 2.62 – 26.2 ft/min
2		T7: brushless blower motor significantly greater air volume
3		dry and clean the hot air dries moisture in no time at all, while dust and sand are blown away
4		Optimum handling thanks to clever grip options
5		a. T7: Communication module myLeister with WiFi, GPS, LQS, voltmeter, e-Drive b. T5: Basic functions with digital accuracy
6		Gearbox and motor separated with service-friendly timing belt
7		Reinforced double-row drive chains
8		Field kit for more ground clearance
9		a. T7: digital joining force display b. T5: Force module with overload protection

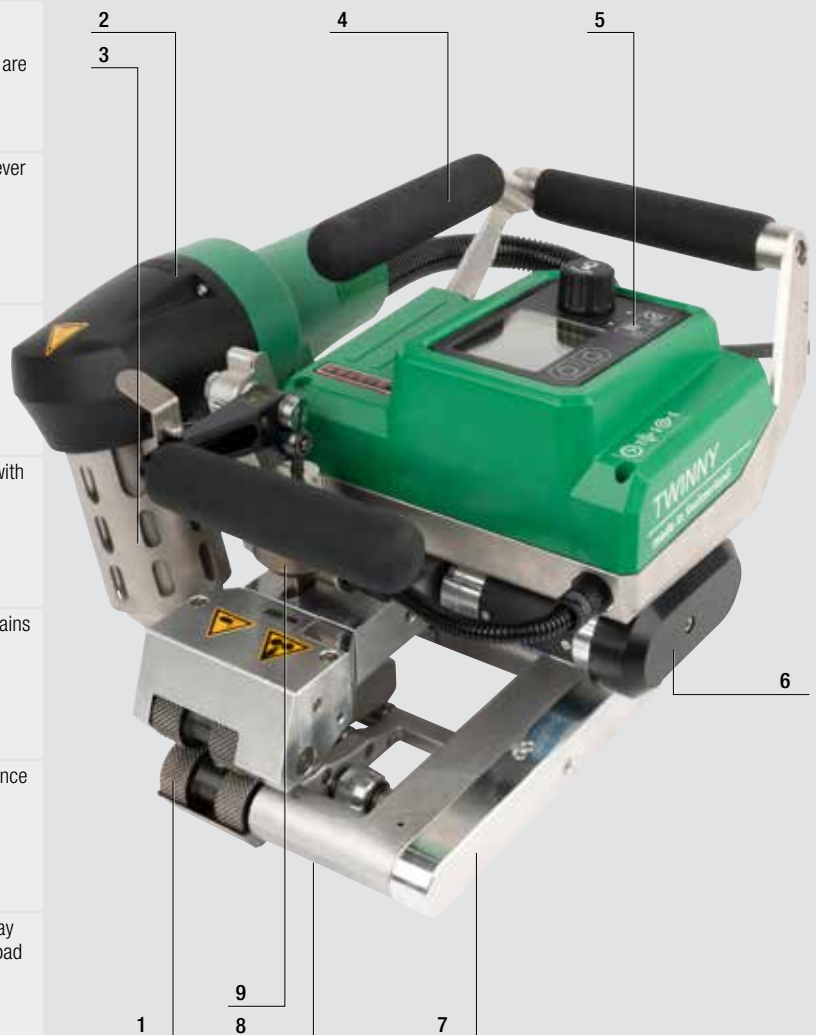



Display TWINNY T7



Display TWINNY T5

Hot-air welder

TWINNY T7/T5



- **powerful:** 3300 watts, enabling more heating power
- **sustainable:** TWINNY T7 and T5 are durable and easy to service

Technical data		TWINNY T7	TWINNY T5
Voltage; Frequency	V-;Hz	230; 50/60	230, 120; 50/60
Power	W	3450	3450 (1800 @ 120V)
Max. Temperature	°F	1040	1040
Blower Motor	rpm	Maintenance free Brushless Motor max.18'000	Brushed Motor max. 12'000
Air volume	%	45 – 100	
Max. Overlap	inch	4.92	
Max. Welding pressure	N	1000	
Drive speed	ft/min	2.62 – 26.2	
LQS, WIFI, GPS		Yes	No
Digital Pressure display		Yes	No
Digital Voltage display		Yes	No
Audible / Visual Alarms		Yes	No
Welding pressure overload protection		Visual and acoustical warning	Mechanical
Size (L x W x H)	inch	1.15 x 1.18 x 0.85	
Weight	lbs	23.15	21.8
Protection class /Conformity		⚡ / CE	


Article No.:	CEE blue plug	Euro plug
TWINNY T7 230 V / 3450 W CWL w/TC Ro 1.97 in sharp Field kit	164.198	164.197
TWINNY T7 230 V / 3450 W CWS w/TC Ro 1.97 in sharp Field kit	164.215	164.214
TWINNY T7 230 V / 3450 W CWL wo/TC Ro 1.97 in blunt Field kit	164.217	164.216
TWINNY T7 230 V / 3450 W CWS wo/TC Ro 1.97 in blunt Field kit	164.219	164.218
TWINNY T7 230 V / 3450 W CWS wo/TC Ro 1.97 in Silicone Indoor kit	164.221	164.220
TWINNY T5 230 V / 3450 W CWL w/TC Ro 1.97 in sharp Field kit	164.223	164.222
TWINNY T5 230 V / 3450 W CWS w/TC Ro 1.97 in sharp Field kit	164.225	164.224
TWINNY T5 230 V / 3450 W CWL wo/TC Ro 1.97 in blunt Field kit	164.227	164.226
TWINNY T5 230 V / 3450 W CWS wo/TC Ro 1.97 in blunt Field kit	164.229	164.228
TWINNY T5 230 V / 3450 W CWS wo/TC Ro 1.97 in Silicone Indoor kit	164.231	164.230
TWINNY T5 120 V / 1800 W CWS w/TC Ro 1.97 in sharp Field kit	164.232	
TWINNY T5 120 V / 1800 W CWS wo/TC Ro 1.97 in blunt Field kit	164.233	

CWL = Combi wedge long / CWS=Combi wedge short / W/TC = with Test channel / wo/TC = without Test Channel / Ro = Roller width

Scope of delivery: Machine, storage case, cleaning brush, Instruction manual

Accessories TWINNY T7/T5

	155.629 Combi-wedge long, 1.97 in, with test channel
	155.630 Combi-wedge long, 1.97 in, without test channel
	155.634 Combi-wedge short, 1.97 in, with test channel
	155.637 Combi-wedge short, 1.97 in, without test channel
	159.135 Long handle complete
	164.025 Indoor roller kit

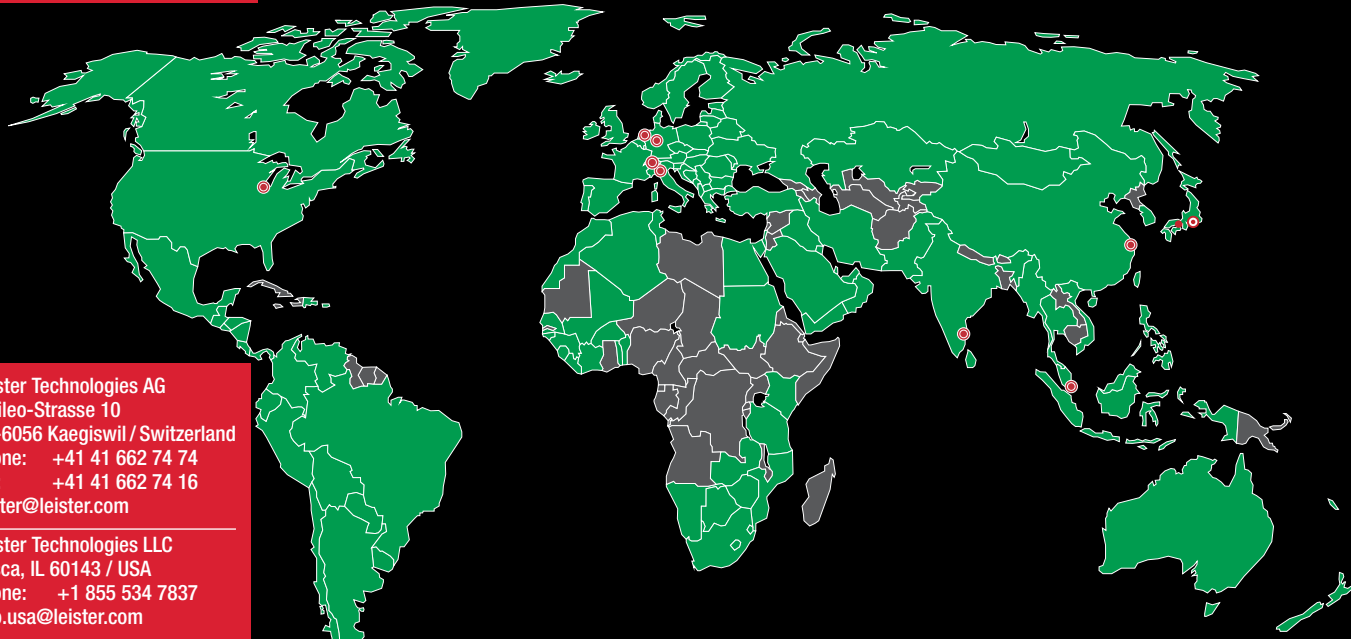

Leister Technologies AG
Galileo-Strasse 10
CH-6056 Kaegiswil / Switzerland
phone: +41 41 662 74 74
fax: +41 41 662 74 16
leister@leister.com

Leister Technologies LLC
Itasca, IL 60143 / USA
phone: +1 855 534 7837
info.usa@leister.com

Leister Technologies Ltd.
Shanghai 201 109 / PRC
phone: +86 21 6442 2398
leister@leister.cn

Leister Technologies KK
Osaka 564-0051 / Japan
phone: +81 6 6310 62 00
sales-japan@leister.com

Leister Technologies Benelux BV
3991 CE Houten / Nederland
phone: +31 (0)30 2199888
info@leister.nl

Leister Technologies Italia s.r.l.
20090 Segrate / Italia
phone: +39 02 2137647
sales@leister.it

Leister Technologies India Pvt
600 041 Chennai / India
phone: +91 44 2454 3436
info@leister.in

Leister Technologies Deutschland GmbH
D-58093 Hagen / Germany
phone: +49-(0)2331-95940
info.de@leister.com

We are local. Worldwide.

Our close worldwide network of more than 130 Sales and Service Centers in more than 100 countries.

- | | | | | | | | | |
|---|--|--|--|--|---|---|---|---|
| Europe:
Andorra
Austria
Belgium
Cyprus
Denmark
Finland
France
Germany
Greece
Iceland
Ireland
Italy
Luxembourg
Malta
Monaco
Netherlands
Norway
Portugal
Liechtenstein
San Marino
Spain | Sweden
Switzerland
Turkey
United Kingdom
Vatican
Albania
Armenia
Azerbaijan
Belarus
Bosnia-Herzegovina
Bulgaria
Croatia
Czech Republic
Estonia
Georgia
Hungary
Kosovo
Latvia
Lithuania
Macedonia
Moldova
Montenegro | Americas:
Canada
Mexico
USA
Belize
Costa Rica
El Salvador
Guatemala
Honduras
Nicaragua
Panama
Argentina
Bolivia
Brazil | Poland
Romania
Russia
Serbia
Slovakia
Slovenia
Ukraine | Central Asia:
Kazakhstan
Kyrgyzstan
Tajikistan
Turkmenistan
Uzbekistan | Chile
Colombia
Ecuador
Peru
Venezuela | Africa:
Algeria
Botswana
Egypt
Ivory Coast
Kenya
Lesotho
Libya
Malawi
Morocco
Mozambique
Namibia
North Sudan
South Africa
Swaziland
Tunisia
Zambia
Zimbabwe | Asia Pacific:
Bangladesh
China
Hong Kong
India
Indonesia
Japan
Korea
Macao
Malaysia
Mongolia
Philippines
Singapore
Sri Lanka
Taiwan
Thailand
Vietnam | Oceania:
Australia
New Zealand |
|---|--|--|--|--|---|---|---|---|

© Copyright by Leister, Switzerland

Distributor Addresses: